

## موبایل پرینتر کمری یوروو (Urovo) مدل K319



✓ قابلیت چاپ مستقیم فونت فارسی (B Nazanin) در سایزهای مختلف

✓ مقاوم در برابر سقوط از ارتفاع ۱/۲ متری IP: 54

✓ دارای نگه دارنده با امکان استفاده از کاغذهای ۳ اینچی و ۲ اینچی / عرض چاپ ۷۲ میلی متر


✓ سرعت چاپ ۱۰۰ میلی متر بر ثانیه

✓ قابلیت چاپ روی کاغذ و لیبل حرارتی

✓ باطری ظرفیت بالا ۲۶۰۰ میلی آمپر

✓ اتصالات: بلوتوث نسخه ۴

✓ لوازم جانبی استاندارد: کیف چرمی / کابل USB / آداپتور / باطری

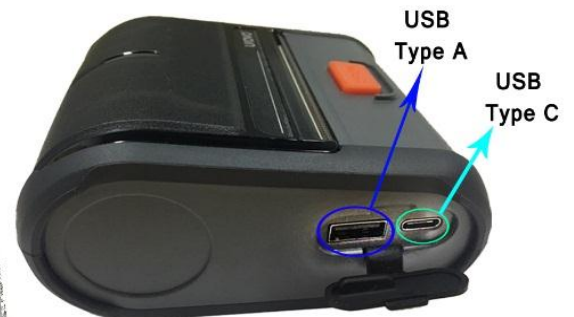

## SPECIFICATION

## PRINTER SPECIFICATION

Printer Model	Direct Thermal
Maximum Printer Width	3"/72mm
Maximum Printer Speed	100mm per second
Resolution	203dpi(8 dots/mm)
Print life	150km(25%Print density or the following)Ech point:1.5million pulses
Power	19.76Wh(2600mAh)/7.4V Rechargeable lithium polymer battery
Characher Sets	English,Persian 'Font(B Nazanin),Russian,Arabic,Thai and other languages.and Chinese Japanese Korean characters, graphics, curvr, pre-Storage Icon 1D bar-code:UPC-A,UPC-E,CODE39,EAN-13,EAN-8,CODEBAR,CODE128,CODE93,ITF 2D bar-code :QR Code ,PDF417,DATAMATRIX ESC/POS CPCL(Compatibility)
Programming Languages	ESC/POS CPCL(Compatibility)
Support System	Support Microsoft Standard SDK, API interface invocationn(CE5.0 or above,Mobile5.0 or above) Support Google Standard SDK, API interface invocation (2.0 or above) Support IOS System &Supply IOS SDK

## MEDIA SPECIFICATIONS

Media width	42mm-80mm between any print width
Maximum Media Roll Size	50mm
Media Thickness	1.97-7.09mil
Media Type	Labals ,Thermal paper

## COMMUNICATION

Wired	USB port Type	USB HOST Type-C
Bluetooth	Bluetooth2.1+4.0(BLE)	

## PHYSICAL CHARACTERISTICS

Size(L*W*H)	109mm*107mm*55mm
Weight	354g

## OTHERS

Charging interval	-2.5h
Standard-by time	180-200h
Promot Display	Paper out prompt, Battery lowprompt,Cover/opend prompt, Charging completed prompt,Printing,Communication mod OLED screen

## ENVIRONMENT

## Operating Temperature

Operating Temperature	Min 32°F(0°C)	Max +122°F(+50°C)
Operating humidity(Relatively)	20%	85%

## Storage Temperature

Storage Temperature	Min -4°F(-20°C)	Max +158°F(+70°C)
Storage Temperature (Relatively)	5%	95%

Drop To Concrete 1/2 M

IP 54

